

Flat Glass

General Catalogue



EN

Flat Glass Technology

Copyright © 2022 BOTTERO S.p.A. All Rights Reserved

we • glass

we ●

glass

we **know** glass, we **love** glass

As a global leader in flat glass and hollow glass processing technology, we have been helping to shape one of the most beautiful and useful materials in the world for over 60 years. Its unique qualities, combined with the passion for technology and innovation, guide us in seeking for newer and more effective solutions to improve and expand its use.



The most vast range of products for any production and storage management requirement with any automation level.


07 EX Automatic breakout system

The automatic breakout solution is made up of a belt conveyor, a breakout unit and an air cushion table. The belt conveyor is a totally modular machine for transporting and positioning the sheet on the breakout unit, completed with a set of fishbone belts to ensure maximum positioning precision, and with a gear motor controlled by dedicated encoder and inverter.

Type of glass in stock	Many
Number of cutting lines	Up to 2
Automation level	★★★★•

Evaluation based on comparison with other Bottero products of the same category.



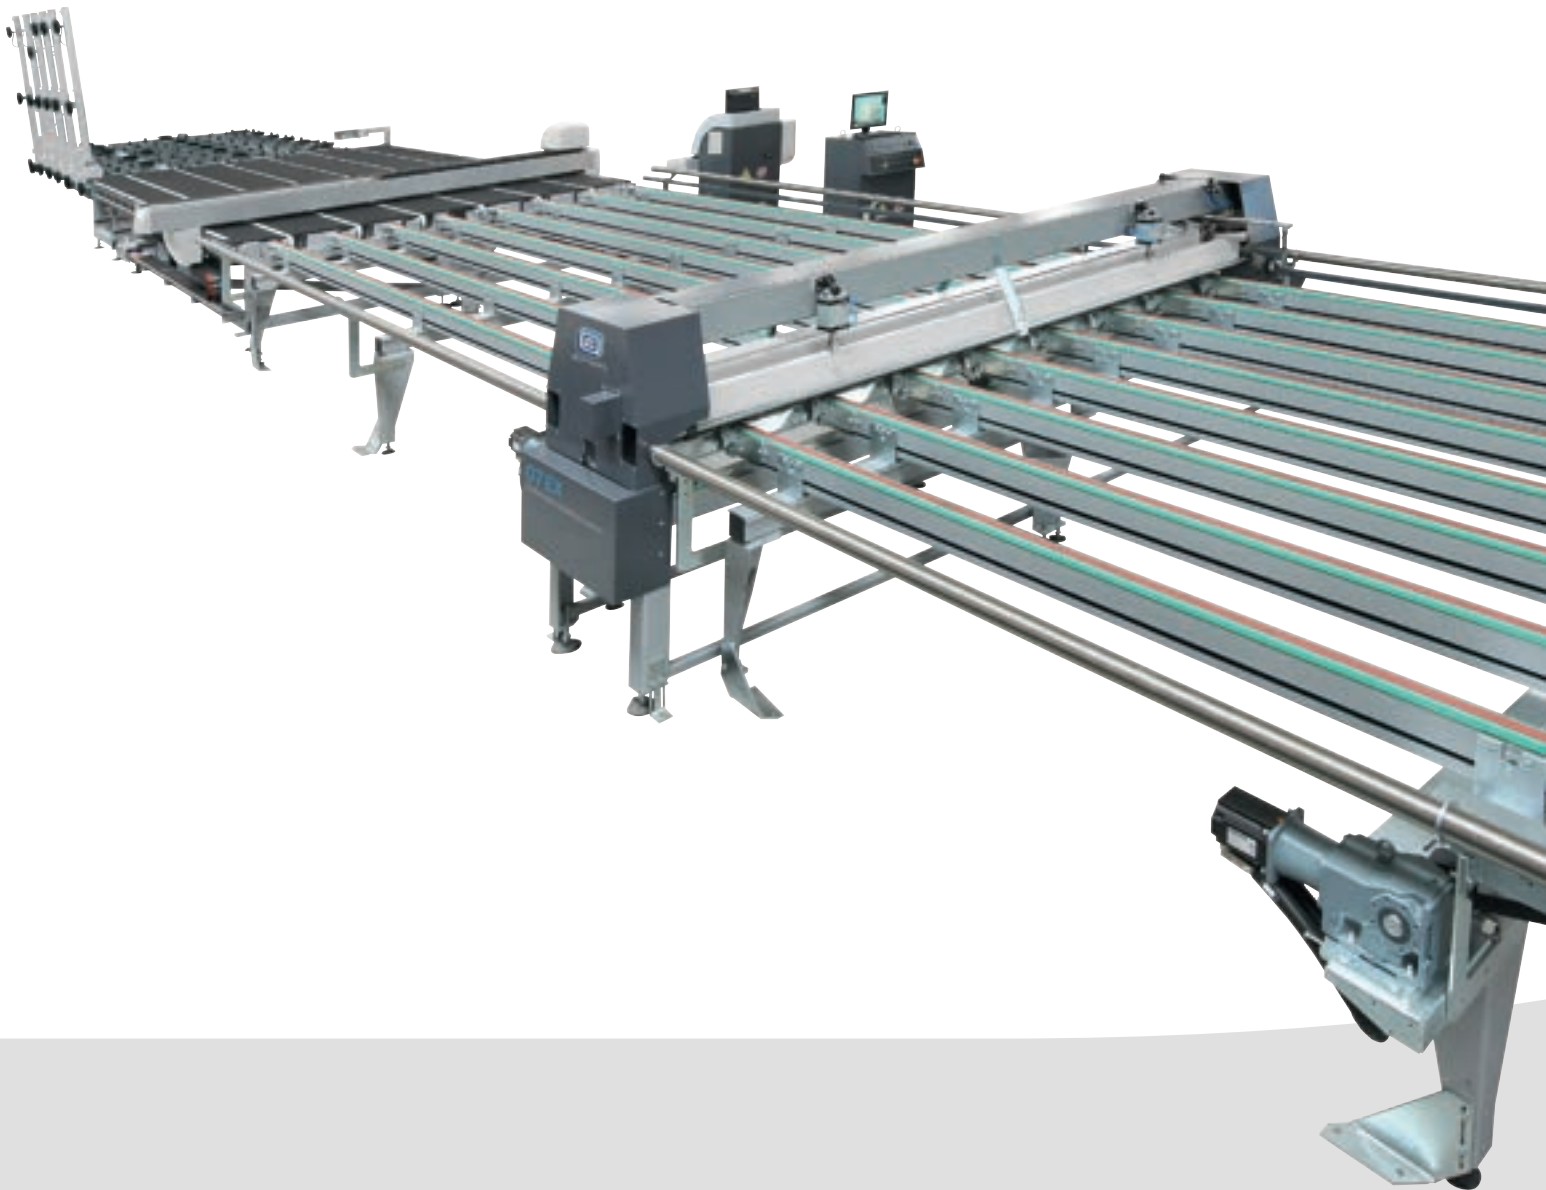

Technical features

	Metric	Imperial
Max X breakout dimension	3300 mm 2750 mm	130" 108"
Min X & Y breakout dimension	400 mm	16"
Min trim	25 mm	1575 ipm
Glass thicknes	2 ÷ 8 mm	5/64" ÷ 20/64"
Opt. glass thickness	5/64" ÷ 20/64"	25/64" ÷ 1/2"